


SERIE / MODEL
 CODICE / CODE

MPG □□
 03.12.□□.01

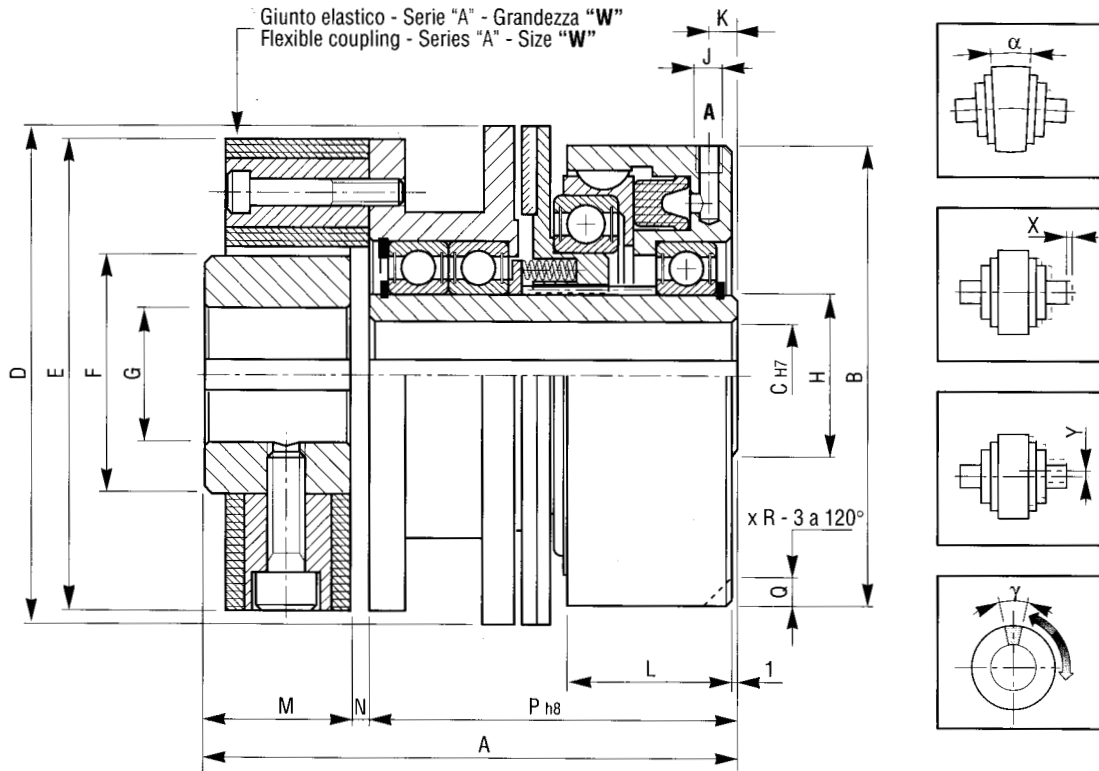

| □□□ | Momenti - FRIZIONE Torques - CLUTCH Ms(Nm) | Giri/1' R.P.M. max | Pressione lavoro Working pressure bar | Volume cilindro Cylinder volume cm ³ | Grandezza giunto Coupling size W | Momenti - GIUNTO Torques - COUPLING Nm max | Peso Weight kg |
|-----|--|--------------------------|---|---|--|--|----------------------|
| 00 | 20 | 3000 | 6 | 6 | 2 | 60 | 4,6 |
| 01 | 30 | 3000 | 6 | 8 | 4 | 120 | 6,5 |
| 02 | 50 | 2400 | 6 | 12 | 8 | 280 | 8,4 |
| 03 | 65 | 2400 | 6 | 15 | 8 | 280 | 9,8 |
| 04 | 100 | 2000 | 6 | 25 | 16 | 560 | 13,6 |
| 05 | 140 | 2000 | 6 | 30 | 16 | 560 | 15,5 |
| 06 | 240 | 1600 | 6 | 40 | 25 | 875 | 23,2 |
| 07 | 350 | 1400 | 6 | 50 | 30 | 1400 | 32,7 |

| □□ | A | B | C | | D | E | F | G | | H | J | K | L | M | N | P | QxR | X | Y | α | γ |
|----|-----|-----|-----|-----|-----|-----|-----|------|-----|----|------|-----|----|----|---|-----|-------|---|-----|----|-----|
| | | | min | max | | | | min. | max | | | | | | | | | | | | |
| 00 | 118 | 97 | 14 | 20 | 112 | 85 | 40 | 10 | 28 | 30 | 1/8" | 7 | 38 | 28 | 4 | 86 | 9x 9 | 3 | 1,5 | 3° | 17° |
| 01 | 127 | 115 | 15 | 25 | 118 | 100 | 45 | 12 | 30 | 35 | 1/8" | 7 | 46 | 30 | 4 | 93 | 10x10 | 3 | 1,5 | 3° | 12° |
| 02 | 144 | 127 | 18 | 34 | 136 | 120 | 60 | 12 | 38 | 45 | 1/8" | 7 | 44 | 42 | 4 | 98 | 10x10 | 4 | 2 | 3° | 14° |
| 03 | 147 | 134 | 18 | 34 | 146 | 120 | 60 | 12 | 38 | 45 | 1/8" | 7,5 | 45 | 42 | 4 | 101 | 10x10 | 4 | 2 | 3° | 14° |
| 04 | 168 | 153 | 20 | 46 | 168 | 150 | 70 | 15 | 48 | 60 | 1/4" | 9 | 49 | 50 | 6 | 112 | 12x12 | 5 | 2 | 3° | 14° |
| 05 | 169 | 167 | 25 | 50 | 178 | 150 | 70 | 15 | 48 | 65 | 1/4" | 9 | 55 | 50 | 6 | 113 | 12x12 | 5 | 2 | 3° | 14° |
| 06 | 190 | 193 | 30 | 60 | 218 | 170 | 85 | 15 | 55 | 75 | 1/4" | 9 | 60 | 55 | 6 | 129 | 12x12 | 5 | 2 | 3° | 14° |
| 07 | 220 | 216 | 30 | 68 | 248 | 200 | 100 | 20 | 65 | 85 | 1/4" | 9 | 65 | 66 | 8 | 146 | 14x14 | 5 | 2 | 3° | 14° |